





# LR6-72HPH 365~385M

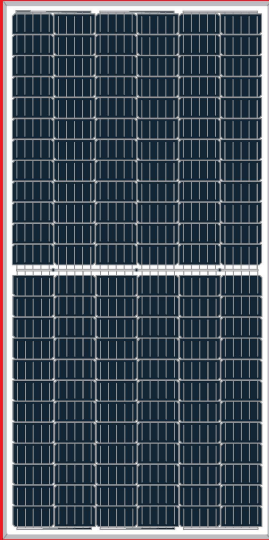

**High Efficiency  
Low LID Mono PERC  
with Half-cut Technology**

10-year Warranty for Materials and Processing;  
25-year Warranty for Extra Linear Power Output

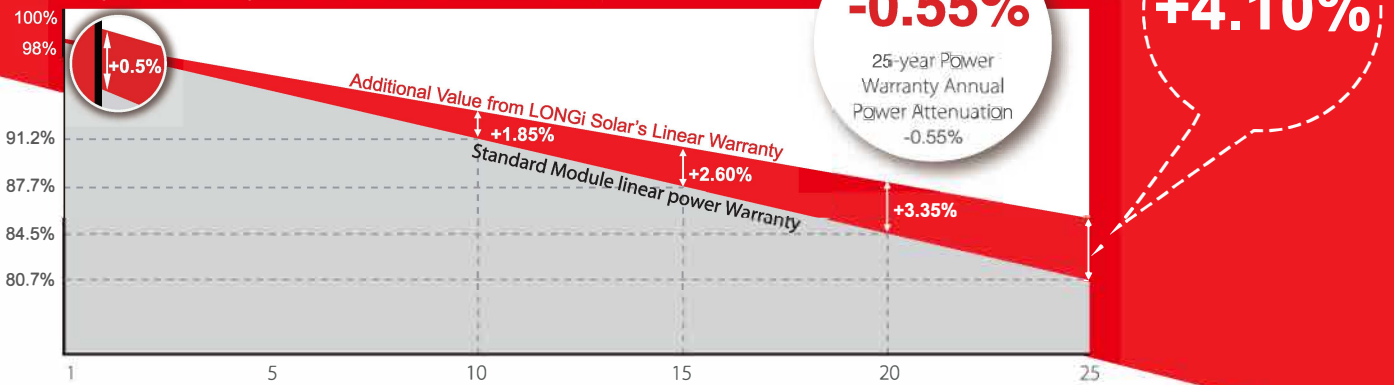

### Complete System and Product Certifications

- IEC 61215, IEC61730, UL1703
- ISO 9001:2008: ISO Quality Management System
- ISO 14001: 2004: ISO Environment Management System
- TS62941: Guideline for module design qualification and type approval
- OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

**Positive power tolerance** (0 ~ +5W) guaranteed

**High module conversion efficiency** (up to 19.5%)

**Slower power degradation** enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Adaptable to harsh environment:** passed rigorous salt mist and ammonia tests

**Outstanding low light performance** average relative efficiency 97.5% or better at 200W/m<sup>2</sup>

**Reduced resistive loss** with lower operating current

**Higher energy yield** with lower operating temperature

**Reduced hot spot risk** with optimized electrical design and lower operating current

# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
Facebook: www.facebook.com/LONGi Solar


Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR6-72HPH 365~385M

## Design (mm)

## Mechanical Parameters

## Operating Parameters

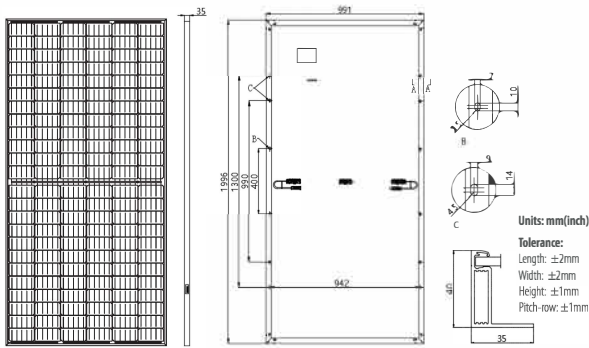

Cell Orientation: 144 (6x24)  
 Junction Box: IP67, three diodes  
 Output Cable: 4mm<sup>2</sup>, 300mm in length  
 Weight: 23.5kg  
 Dimension: 1996x991x40mm  
 Packaging: 26pcs per pallet  
 572pcs per container

Operational Temperature: -40°C ~ +85°C  
 Power Output Tolerance: 0 ~ +5 W  
 Maximum System Voltage: DC1500V (IEC)  
 Maximum Series Fuse Rating: 20A  
 Nominal Operating Cell Temperature: 45±2°C  
 Application Class: Class A

## Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-72HPH-365M		LR6-72HPH-370M		LR6-72HPH-375M		LR6-72HPH-380M		LR6-72HPH-385M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Maximum Power (Pmax/W)	365	270.4	370	274.1	375	277.8	380	281.5	385	285.2
Open Circuit Voltage (Voc/V)	48.4	45.2	48.6	45.4	48.8	45.6	49.0	45.7	49.2	46.0
Short Circuit Current (Isc/A)	9.71	7.82	9.79	7.89	9.87	7.95	9.96	8.02	10.03	8.09
Voltage at Maximum Power (Vmp/V)	40.0	36.9	40.2	37.1	40.4	37.3	40.6	37.5	40.8	37.7
Current at Maximum Power (Imp/A)	9.13	7.32	9.21	7.38	9.28	7.44	9.36	7.50	9.43	7.57
Module Efficiency(%)	18.5		18.7		19.0		19.2		19.5	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

## Temperature Ratings ( STC )


Temperature Coefficient of Isc	+0.057%/°C
Temperature Coefficient of Voc	-0.286%/°C
Temperature Coefficient of Pmax	-0.370%/°C

## Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR6-72HPH-375M)

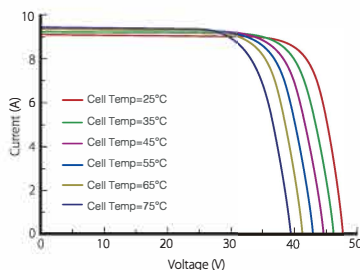

Power-Voltage Curve (LR6-72HPH-375M)

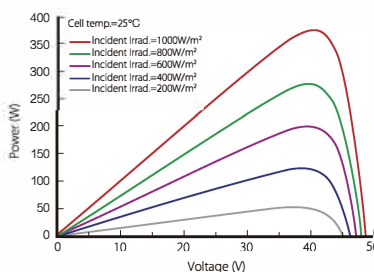

Current-Voltage Curve (LR6-72HPH-375M)

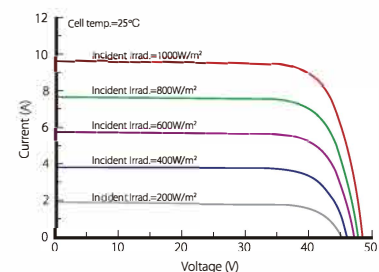

# LONGI Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
 Tel: +86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
 Facebook: www.facebook.com/LONGI Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGI Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.



t. 833.772.9378  
 e. distribution@polaronsolar.com  
 a. 4716 91 Ave NW, Edmonton AB T6B 2L1

20180701