



# LR6-60PE 300~320M

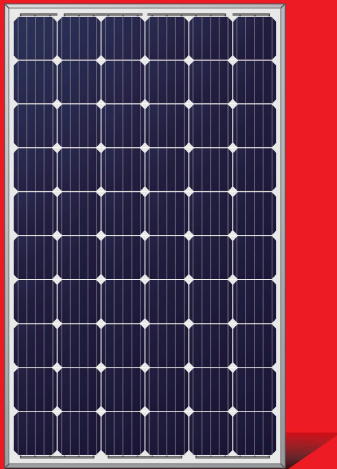

**Hi-MO1 High Efficiency  
Low LID Mono PERC Technology**

10-year Warranty for Materials and Processing;  
25-year Warranty for Extra Linear Power Output

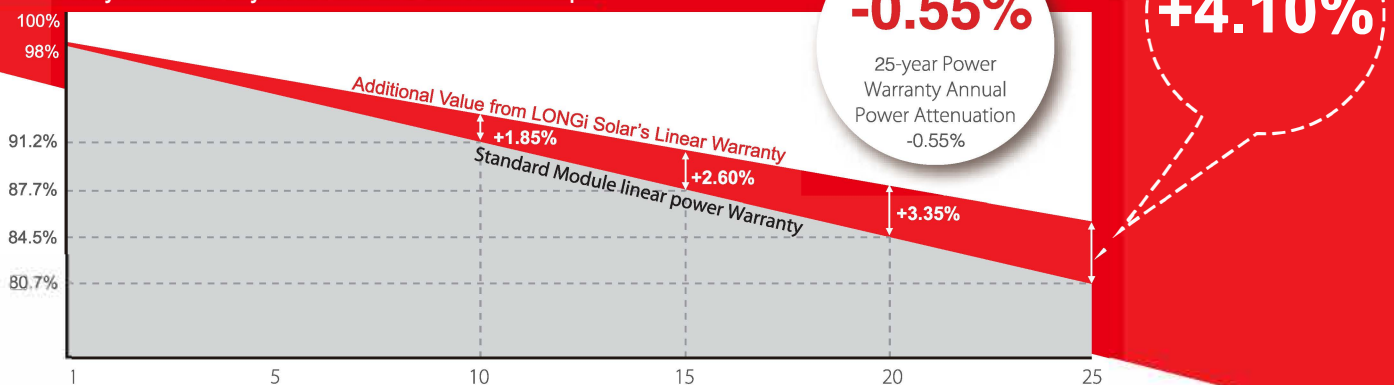

### Complete System and Product Certifications

IEC 61215, IEC61730  
ISO 9001:2008: ISO Quality Management System  
ISO 14001: 2004: ISO Environment Management System  
TS62941: Guideline for module design qualification and type approval  
OHSAS 18001: 2007 Occupational Health and Safety



\* Specifications subject to technical changes and tests. LONGi Solar reserves the right of interpretation.

**Positive power tolerance** (0 ~ +5W) guaranteed

**High module conversion efficiency** (up to 19.3%)

**Slower power degradation** enabled by Low LID Mono PERC technology: first year <2%, 0.55% year 2-25

**Better energy yield** with excellent low irradiance performance and temperature coefficient

**Solid PID resistance** ensured by solar cell process optimization and careful module BOM selection

**Adaptable to harsh environment:** passed rigorous salt mist and ammonia tests

**Robust frame** (40mm) withstands mechanical loading of 5400Pa for snow load on front and 2400Pa for wind load on rear side


# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
Tel: + 86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice; Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

# LR6-60PE 300~320M

## Design (mm)

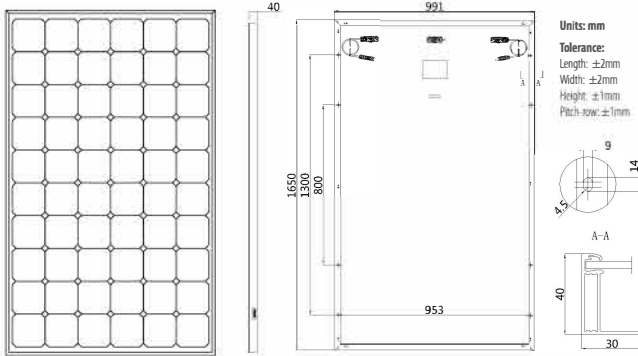

## Mechanical Parameters

Cell Orientation: 60 (6×10)  
 Junction Box: IP67, three diodes  
 Output Cable: 4mm<sup>2</sup>, 1000mm in length  
 Glass: 3.2mm coated tempered glass  
 Weight: 18.2kg  
 Dimension: 1650×991×40mm  
 Packaging: 26pcs per pallet  
 156pcs per 20'GP  
 728pcs per 40'HC

## Operating Parameters

Operational Temperature: -40°C ~ +85°C  
 Power Output Tolerance: 0 ~ +5 W  
 Maximum System Voltage: DC1000V (IEC)  
 Maximum Series Fuse Rating: 20A  
 Nominal Operating Cell Temperature: 45±2°C  
 Application Class: Class A

## Electrical Characteristics

Test uncertainty for Pmax: ±3%

Model Number	LR6-60PE-300M		LR6-60PE-305M		LR6-60PE-310M		LR6-60PE-315M		LR6-60PE-320M	
	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT	STC	NOCT
Testing Condition										
Maximum Power (Pmax/W)	300	222.2	305	225.9	310	229.6	315	233.4	320	237.1
Open Circuit Voltage (Voc/V)	39.9	37.2	40.2	37.5	40.5	37.8	40.8	38.1	41.0	38.3
Short Circuit Current (Isc/A)	9.96	8.03	9.99	8.05	10.02	8.08	10.05	8.10	10.14	8.17
Voltage at Maximum Power (Vmp/V)	32.3	29.8	32.7	30.2	33.1	30.6	33.5	30.9	33.7	31.1
Current at Maximum Power (Imp/A)	9.28	7.44	9.33	7.48	9.36	7.51	9.41	7.55	9.50	7.62
Module Efficiency(%)	18.3		18.7		19.0		19.3		19.6	

STC (Standard Testing Conditions): Irradiance 1000W/m<sup>2</sup>, Cell Temperature 25°C, Spectra at AM1.5

NOCT (Nominal Operating Cell Temperature): Irradiance 800W/m<sup>2</sup>, Ambient Temperature 20°C, Spectra at AM1.5, Wind at 1m/s

## Temperature Ratings ( STC )


Temperature Coefficient of Isc	+0.057%/°C
Temperature Coefficient of Voc	-0.286%/°C
Temperature Coefficient of Pmax	-0.370%/°C

## Mechanical Loading


Front Side Maximum Static Loading	5400Pa
Rear Side Maximum Static Loading	2400Pa
Hailstone Test	25mm Hailstone at the speed of 23m/s

## I-V Curve


Current-Voltage Curve (LR6-60PE-310M)



Power-Voltage Curve (LR6-60PE-310M)



Current-Voltage Curve (LR6-60PE-310M)



# LONGi Solar

Room 201, Building 8, Sandhill Plaza, Lane 2290, Zuchongzhi Road, Pudong District, Shanghai, 201203  
 Tel: +86-21-61047332 Fax: +86-21-61047377 E-mail: module@longi-silicon.com  
 Facebook: www.facebook.com/LONGi Solar

Note: Due to continuous technical innovation, R&D and improvement, technical data above mentioned may be of modification accordingly. LONGi Solar have the sole right to make such modification at anytime without further notice. Demanding party shall request for the latest datasheet for such as contract need, and make it a consisting and binding part of lawful documentation duly signed by both parties.

Authorized Distributor

t. 833.772.9378  
 e. distribution@polaronsolar.com  
 a. 4716 91 Ave NW, Edmonton AB T6B 2L1